

## proxSafe®

### Key Management & Smart Storage Systems

The intelligent management system for keys and equipment with comprehensive audit and reporting capabilities. Control who can have access to individual items and restrict when they can be taken. Keys, radios, test equipment, tools, laptops and much more can now be managed efficiently with increased accountability so you know where they are and who has them. The powerful software Commander Connect allows easy configuration and control of access rights, time profiles and the creation of individual reports. That way you stay in control at all times and make the best use of your equipment.

### keyPanels for single keys


proxSafe keyPanels offer the perfect solution to keep keys safe in the smallest of spaces. Generally speaking there are three different versions of the panel, on which the slots are more or less close together. All panels can be utilised in the different proxSafe product ranges.

Each slot is fitted with an RFID reader that automatically and contactlessly recognises the keyTag inserted in the proxCylinder. An LED on the proxCylinder guides the user to the selected keyTag or rather the object of value to be removed.

An optimised energy management system makes it possible to remove all of the keys simultaneously, if the situation demands. The integrated RFID technology ensures key identification is extremely reliable and is totally maintenance-free even after many years of use. The modular panel concept makes any system size possible with numerous enclosure sizes and configuration options. It is possible at any time to add more keyPanels to a partially populated proxSafe housing.

### Your benefits at a glance:

- **Contactless – no corrosion, no wear, no maintenance**
- **Reliable identification – even after many years of use**
- **Remove all keys simultaneously – at the push of a button**
- **Modular 19" concept for optimum retrofitting options**
- **Illuminated ring to guide users**
- **Maximum utilisation of existing installation space**
- **Optional non-locking version available**

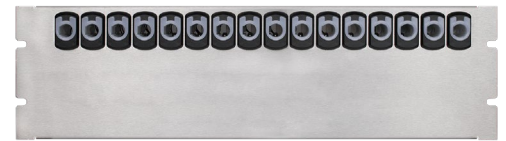

SR 16 V2



DD 32 V2

### Technical data

#### Dimensions WxHxD /

#### Weight:

SR 16 V2 480 x 132,5 x 85 mm / 2,2 kg

DD 32 V2 480 x 132,5 x 85 mm / 2,9 kg

#### Material:

Stainless steel / PC

#### Operating

#### temperature:

+5...+50°C

#### Relative humidity:

5...95%, non-condensing

#### Slots:

SR 16 V2 16

DD 32 V2 32

#### Power requirement:

12 VDC

#### Frequency:

125 kHz

#### Tensile strength:

50 kg (500 Newton)